


MannTek

Key benefits

- Three piece design.
- Unflatten flanges do not affect the torque.
- Low pressure drop.
- Easy service.
- The valve is assembled as one unit - not kept together by the flanges.
- Built-in measurements as common standard.

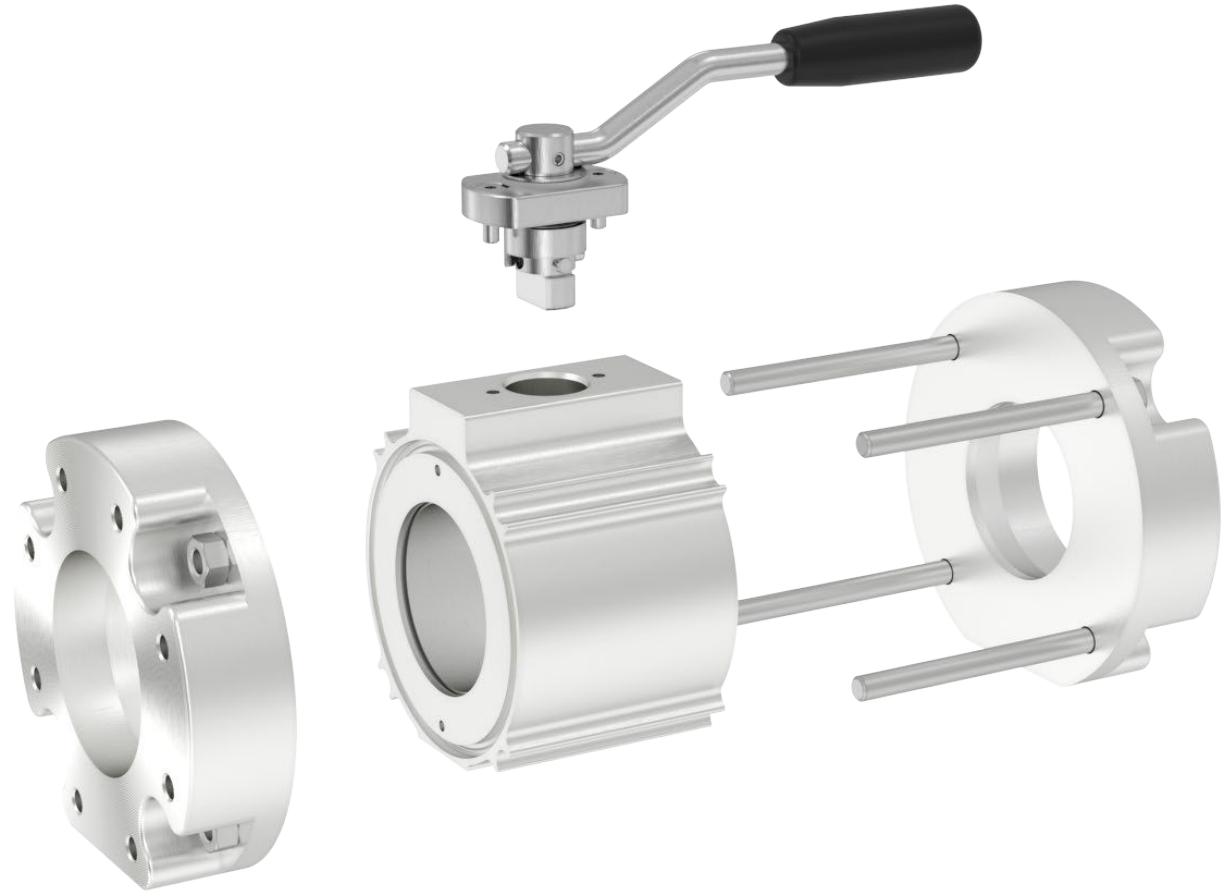

FFBV


Specially designed for handling different types of fuels such as diesel, gasoline, jet fuel etc. in tank trucks.

- Sizes 2", 3" and 4".
- 1-way and 2-way valves.
- Manual or pneumatic operated.
- Material: Aluminium ("no yellow parts").
- Seals: FKM, NBR, low temp seals etc.
- Available with threaded and flanged connections.
- Working pressure: 10 bar.




One-way and two-way valves

One-way valve
One inlet and one outlet.

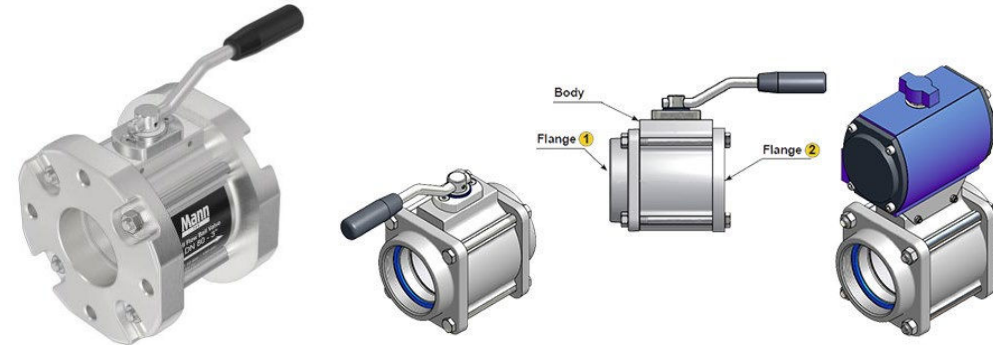

Two-way valve
One inlet and two outlets.

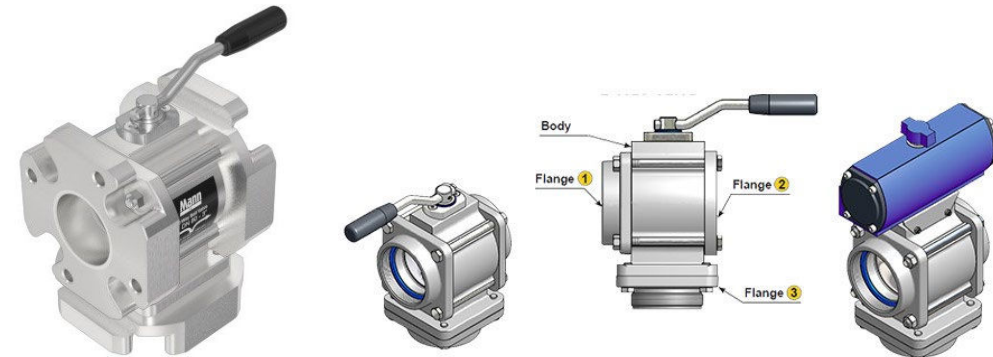

	2", 3", 4"
Threaded connections	BSP/NPT
Flanged connections	EN/ANSI/TW/TTMA
Materials	Aluminium
Seals	FKM, NBR, low temp seals